


BOLTS (WITH GROOVED NUT AND SPLIT PIN)

AI 024

- All **bolts**, which are used as **links between the various insulator string fittings**, are secured with a **grooved nut** and **split pin** acc. to DIN EN ISO 1234.

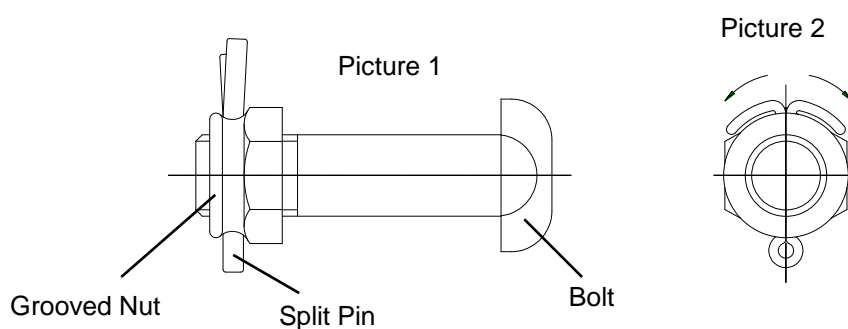

- The Nut has to be screwed on to the bolt till the split pin can be stuck trough the hole at the threaded end of the bolt and the nut as shown in Picture 1.
- The two ends of the split pin have to be bended into the groove of the nut as shown in Picture 2.

REV.	-	02-02-2011 / RES		LANGUAGE	PAGE
	A	01-02-2018 / JOL			
				EN	1 of 1